

# ACCESSORIES

## Fire rated meeting stiles


TECH SHEET: ACC-08

Issue: 08-09-06

**Fire rated meeting stiles suitable for Pyropanel fire doors for up to 4 hours of fire rating**


### DESCRIPTION

Fire rated meeting stiles suitable for Pyropanel fire doors for up to 4 hours of fire rating.

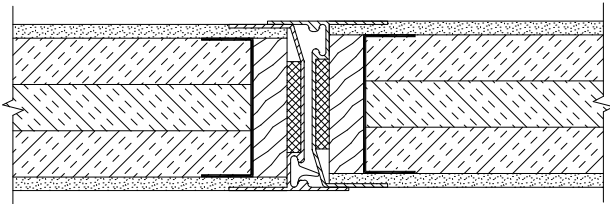


#### **Aluminium J-Section meeting stile (Up to 4 hours of fire rating)**

Standard meeting stile detail of anodised aluminium interlocking J-Section fitted to each leaf. Smoke seals to both leaves available as optional extra. Meeting stile is approved for Life Safety Doors (certified smoke doors). Active leaf should be nominated in specification when ordering.

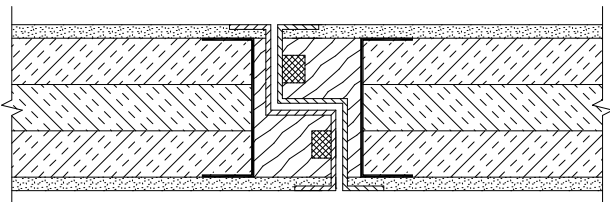


#### **Aluminium rebated meeting stile (Up to 4 hours of fire rating)**

Meeting stile detail of anodised aluminium suitable for doors with up to 4 hours of fire rating.

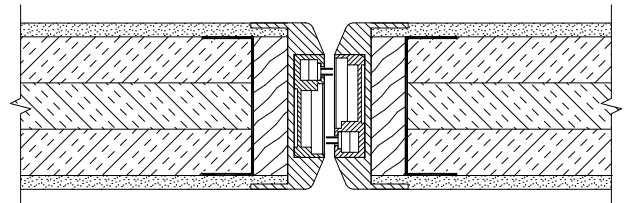


#### **Aluminium bull nosed meeting stile (Up to 3 hours of fire rating)**

Meeting stile detail of anodised aluminium suitable for single acting and double acting fire doors for up to 3 hours of fire rating. Meeting stile incorporates the Pyroseal fin seal.

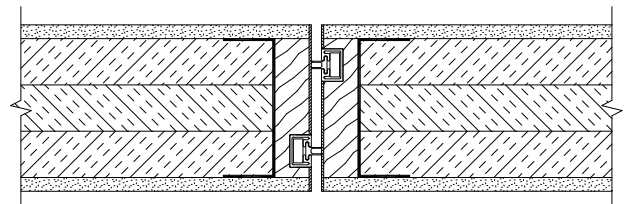

#### **Square edge meeting stile (Up to 1 hour of fire rating)**

Meeting stile detail of with Raven RP76 seals and veneered edge strip to enable the meeting stiles to look like solid timber.

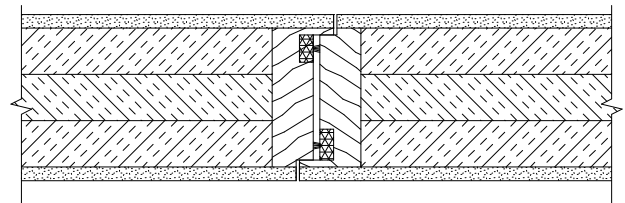

#### **Timber double rebated meeting stile (Up to 1 hour of fire rating)**

Timber meeting stile with double rebated detail and integrated smoke seals.