

ASSA ABLOY

ACOUSTIC DOOR

1 hr Fire Rated, 39 Rw, Single Leaf, Acoustic / Smoke / Fire Door

DESCRIPTION

Pyropanel AS-39-PAFD is a Single leaf, 1hr fire rated, 39 Rw acoustic and smoke resistant doorset.

APPLICATIONS

Ideal for applications that require a 1hr fire rating, an acoustic rating of 39 Rw and smoke resistance.

FEATURES

Fire Rating

- /60/60

Acoustic Rating

- 39 Rw.

Smoke Resistance

- Meets the NCC requirement for a smoke door.

Door Weight

- Approx 30 kg/m²

Door Configuration

- Single leaf.

Thickness

- 47mm (Nominal)

Size

- Maximum Size - 2100 x 940mm.

Hinges

- Minimum 4 steel hinges.

Frame

- KDHW timber frame.

Finish

- MDF to both faces.

Seal combination

Door Type	Perimeter	Bottom	Rw
AS-39-PAFD	Pyropanel Euroseal	Pyropanel PY-BS1	39

Approved Hardware



- Locks: Lockwood 3570 series mortice lock with 1800/1900 series lever furniture.
Lockwood YL17 Cylindrical.
- Closers: Pyropanel LG1500SIL
Pyropanel MD1300SIL
- Hinges: Lockwood 100 series, 100 x 100 mm.

OPTIONAL EXTRAS

- Pre-hung in timber frame.
- Decorative veneers.

INSTALLATION

Door leaf, Door frame, Perimeter seal and Drop seal should be sourced from a Pyropanel Authorised Licensee as a complete set. Door frame must be tightly sealed against wall structure using Pyropanel Multiflex acoustic fire-rated sealant.

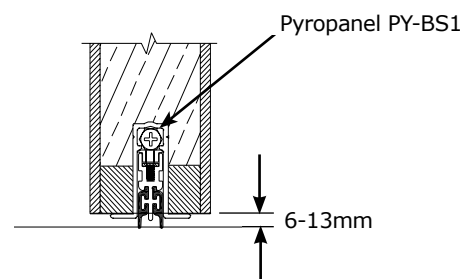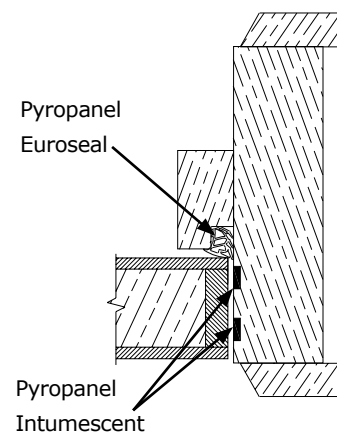

HOW TO SPECIFY

"Doorset to be a Pyropanel AS-39-PAFD door installed in a Pyropanel timber Euroseal frame".

Pyropanel Developments Pty Ltd

235 Huntingdale Road, Oakleigh Vic 3166
Ph: (03) 9837 8500 Fax: (03) 9837 8550
Email: sales@pyropanel.com.au
Web: www.pyropanel.com.au

Distributed by: